



## Phonak Sky V-RIC (V90/V70/V50/V30) (xS)


**WaterResistant Receiver-In-Canal (RIC) instrument with size 13 battery (for fitting range, product details and available options, please see the Product Information or visit [www.phonakpro.com](http://www.phonakpro.com)).**

Phonak Sky V-RIC instruments can be fitted with a Standard (xS), Power (xP) or UltraPower (xUP) external receiver.


### Ear simulator data

IEC 60118-0: 1994

#### Output sound pressure level

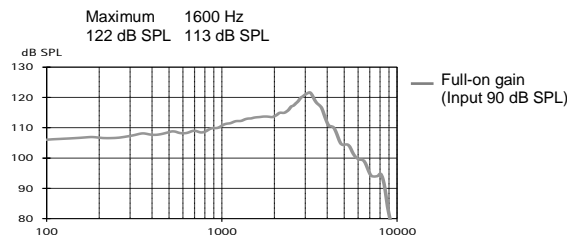


#### Acoustic gain

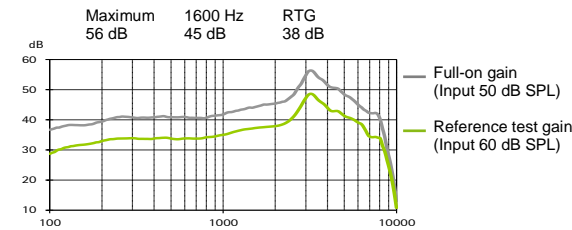

Frequency range	<100 Hz - 9200 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	2%	2.5%
Battery current	Quiescent	Working	
	1.3 mA	1.4 mA	
Equivalent input noise level	19 dB SPL		

#### Induction coil sensitivity

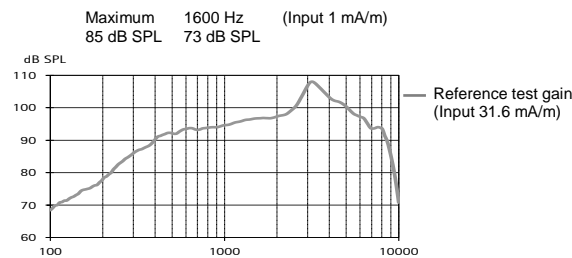


Using pure tone measurements with a digital hearing instrument can result in a wavy frequency response. This is an artifact resulting from the use of a narrowband input signal and does not affect the actual performance with naturally occurring broadband input signals.


### 2cm<sup>3</sup> coupler data

ANSI/ASA S3.22-2014  
IEC 60118-0: 2015

#### Output sound pressure level

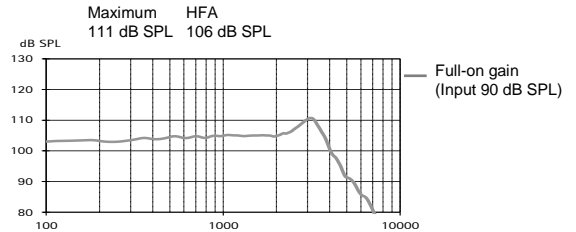


#### Acoustic gain

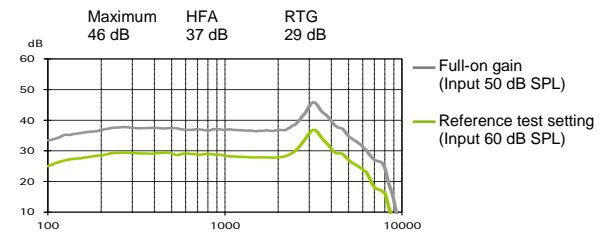

Frequency range	<100 Hz - 8800 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	2%	2%
Battery current	1.4 mA		
Equivalent input noise level	19 dB SPL		

#### Induction coil sensitivity

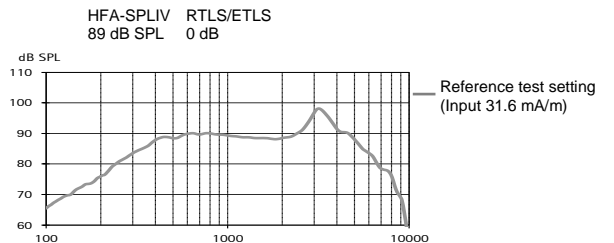



## Phonak Sky V-RIC (V90/V70/V50/V30) (xP)

### Ear simulator data


IEC 60118-0: 1994

### 2cm<sup>3</sup> coupler data


ANSI/ASA S3.22-2014

IEC 60118-0: 2015


#### Output sound pressure level

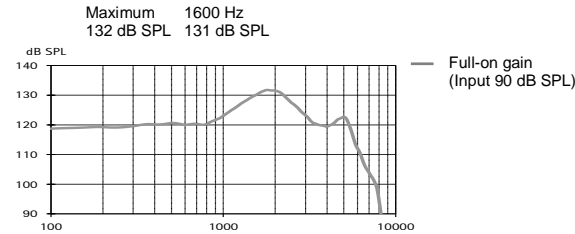


#### Output sound pressure level

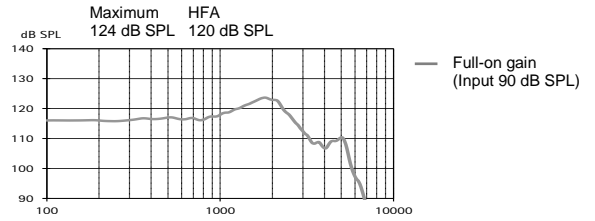

#### Acoustic gain

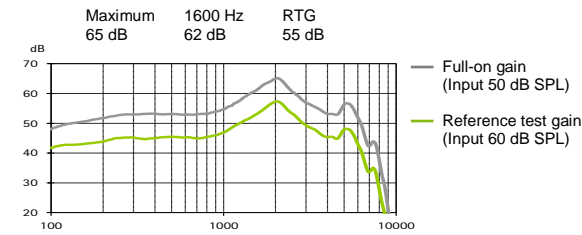


#### Acoustic gain

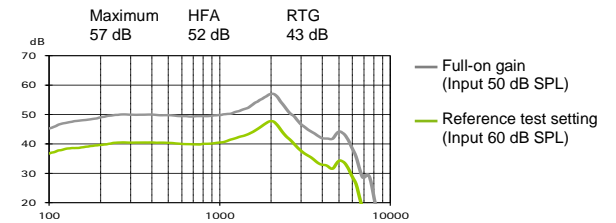


Frequency range	<100 Hz - 6400 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	1.5%	1.5%
Battery current	Quiescent	Working	
	1.3 mA	1.4 mA	
Equivalent input noise level	19 dB SPL		

Frequency range	<100 Hz - 6600 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1%	1%	1%
Battery current	1.4 mA		
Equivalent input noise level	19 dB SPL		

#### Induction coil sensitivity

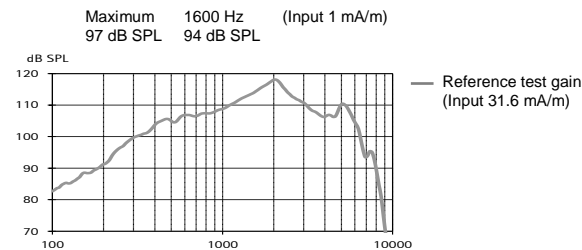

#### Induction coil sensitivity

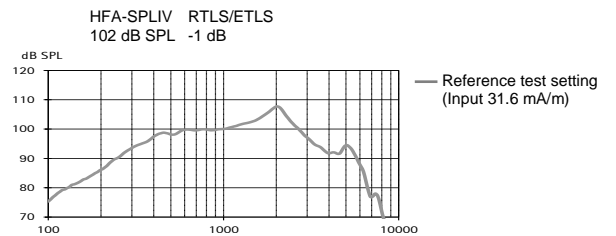



## Technical Data


# Phonak Sky V

## Phonak Sky V-RIC (V90/V70/V50/V30) (xUP)


### Ear simulator data

IEC 60118-0: 1994

#### Output sound pressure level

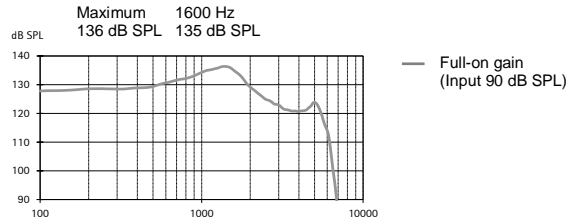


#### Acoustic gain

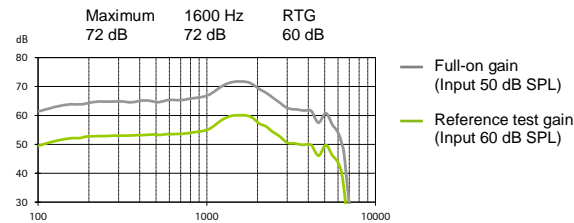

Frequency range	<100 Hz - 5800 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	2%	1.5%	1%
Battery current	Quiescent	Working	
	1.3 mA	1.5 mA	
Equivalent input noise level	19 dB SPL		

#### Induction coil sensitivity

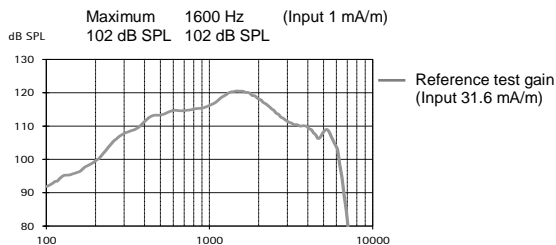


### 2cm<sup>3</sup> coupler data


ANSI/ASA S3.22-2014

IEC 60118-0: 2015

#### Output sound pressure level

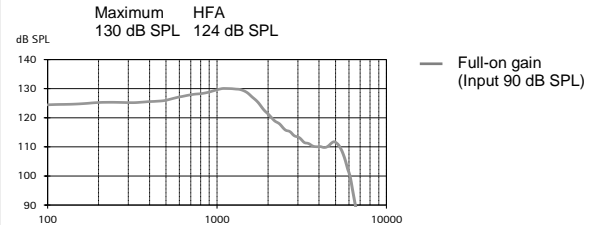


#### Acoustic gain

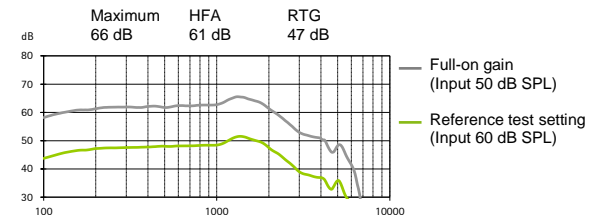

Frequency range	<100 Hz - 6000 Hz		
Total harmonic distortion	500 Hz	800 Hz	1600 Hz
	1.5%	1.5%	1%
Battery current	1.5 mA		
Equivalent input noise level	19 dB SPL		

#### Induction coil sensitivity

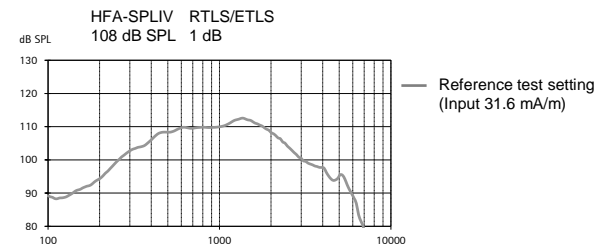

PHONAK